



1400 SECURITY APPLIANCES BRANCH AND SMALL OFFICE SECURITY

CHECK POINT 1400 APPLIANCES

Branch and Small Office Security

Product Benefits

- All-in-one protection against viruses, spam, bots, dangerous applications, malicious websites and zero-day threats with SandBlast
- Continuous security updates from ThreatCloud™
- Fast set-up, instant protection
- Secure remote access for your mobile workers
- Multiple management options to address any organization's needs
- Simplified web-based local management
- Centralized with our enterprise Security Management or Multi-Domain Management products

Product Features

- Highest ranked Next Generation Firewall
- Profile-based management designed for large-scale deployments
- Multiple internet access options including DSL and support of external 3G/4G/LTE modems
- Integrated 802.11ac wireless security with guest access
- Power over Ethernet (PoE and PoE+) option

THE BRANCH OFFICE CHALLENGE

In the age of global business and a more distributed workforce, remote and branch staff demand access to corporate resources in order to work effectively and efficiently. However, even a small data breach can expose companies to crippling lawsuits, penalties and loss of reputation. Branch offices need an inexpensive, yet effective solution to provide secure access to critical resources from anywhere, while minimizing the risk of a data breach.

OUR SOLUTION

The Check Point 1400 Appliance family is a simple, affordable and easy to deploy all-in-one solution for delivering industry leading security to protect the weakest link in your enterprise network—the remote branch offices. Protect against cyber threats with Check Point Threat Prevention all in a quiet, compact desktop form factor.



	NGTP	+ SandBlast
Firewall	✓	✓
VPN (IPsec)	✓	✓
IPS	✓	✓
Application Control	✓	✓
URL Filtering	✓	✓
Anti-Bot	✓	✓
Anti-Virus	✓	✓
Anti-Spam	✓	✓
SandBlast Threat Emulation	✗	✓

* Full SSL/TLS inspection is available when centrally managed

Setup is done in minutes using our step-by-step configuration wizard. The 1400 Appliances are manageable centrally by means of the Check Point enterprise Security Management or Multi-Domain products. Available in two appliances, the 1430/1450 and the 1470/1490, these appliances come standard with eight (8) 1-Gigabit or sixteen (16) Ethernet ports respectively. Connect securely from any device directly or through secure authenticated Wi-Fi.

1430/1450 (Wi-Fi DSL options)

- 1 802.11n/ac wireless (optional)
- 2 6x 1GbE LAN ports
- 3 1x 1GbE DMZ port
- 4 1x 1GbE WAN port
- 5 RJ-45/micro USB Console port
- 6 DSL port
- 7 12V power connector
- 8 USB port




	1430	1450
Ideal Testing Conditions		
Firewall 1518 Byte UDP Packets (Mbps)	2,000	2,500
IPS Throughput (Mbps)	325	575
NGFW Throughput (Mbps) ¹	300	490
Threat Prevention (Mbps) ²	225	400
VPN AES-128 Throughput (Mbps)	275	500
Connections per Second	20,000	27,000
Concurrent Connections	500,000	500,000
Real-World Production Conditions		
SecurityPower	75	141
Firewall Throughput (Mbps)	900	1,100
IPS Throughput (Mbps)	175	225
NGFW Throughput (Mbps) ¹	100	210
Threat Prevention (Mbps) ²	90	150
Software		
Security	Firewall, VPN, User Awareness, QoS, Application Control, URL Filtering, IPS, Anti-Bot, Antivirus, Anti-Spam and SandBlast Threat Emulation (sandboxing)	
Unicast, Multicast Routing	OSPFv2, BGPv4 and 4++, RIP, PIM (SM, DM, SSM), IGMP	
Mobile Access User License	100 in default package, 150 maximum	100 in default package, 150 maximum
Hardware		
WAN	1x 10/100/1000Base-T RJ-45 port	
DMZ	1x 10/100/1000Base-T RJ-45 port	
LAN Switch	6x 10/100/1000Base-T RJ-45 ports	
Wi-Fi (optional)	802.11 b/g/n/ac MIMO 3x3	
Radio Band (association rate)	1 radio band: 2.4Ghz (max 450 Mbps) or 5Ghz (max 1300 Mbps)	
Console Port	1x RJ-45, 1x Mini USB	
USB Port	1x USB 3.0	
SD Card Slot	Micro SDHC slot	
3G/4G Modem Support	Yes	
DSL (optional)	VDSL: G.993.1 (VDSL), G.993.2 (VDSL2), G.993.5 (VDSL2 Vectoring), G.998.4 (G.INP) VDSL2 profiles: 8a, 8b, 8c, 8d, 12a, 12b, and 17a ADSL: Annex A (POTS), Annex B (ISDN), G.992.1 (ADSL), G.992.3 (ADSL2), G.992.5 (ADSL2+), Annex M (ADSL2/2+) ,Annex L Reach-extended (ADSL2) Dying Gasp, DSL Forum TR-067, TR-100, TR-114 Conformity	
Dimensions		
Enclosure	Desktop	
Dimensions WxHxD	210 x 42.5 x 155 mm, 8.3 x 1.7 x 6.1 in.	
Weight	1.3 kg (2.8 lbs.)	
Environment		
Operating / Storage	0°C ~ 40°C / -45°C ~ 60°C (5~95%, non-condensing)	
Power Requirements		
AC Input	110 – 240V, 50 – 60 Hz	
Power Supply Rating	12V/3.33A 40W desktop adaptor	
Power Consumption (Max)	25W (non-Wi-Fi), 30W (Wi-Fi option)	
Heat Dissipation	85.3 BTU/hr (non-Wi-Fi), 102.4 BTU/hr (Wi-Fi option)	
Certifications		
Safety / Emissions / Environment	UL/c-UL, IEC 60950 CB / EMC: EN55022 Class B, FCC: Part 15 Class B / RoHS, REACH, WEEE	

¹ Includes Firewall, Application Control and IPS

² Includes Firewall, Application Control, URL Filtering, IPS, Antivirus, Anti-Bot and SandBlast Zero-Day Protection

1470/1490 (PoE and Wi-Fi options)

- 1 12x 1GbE LAN ports
- 2 4x PoE 1GbE LAN ports (PoE option)
- 3 1x 1GbE WAN port
- 4 1x 1GbE copper/fiber DMZ port
- 5 12V power connector
- 6 2x USB ports
- 7 RJ-45/micro USB console port
- 8 802.11n/ac (Wi-Fi option)

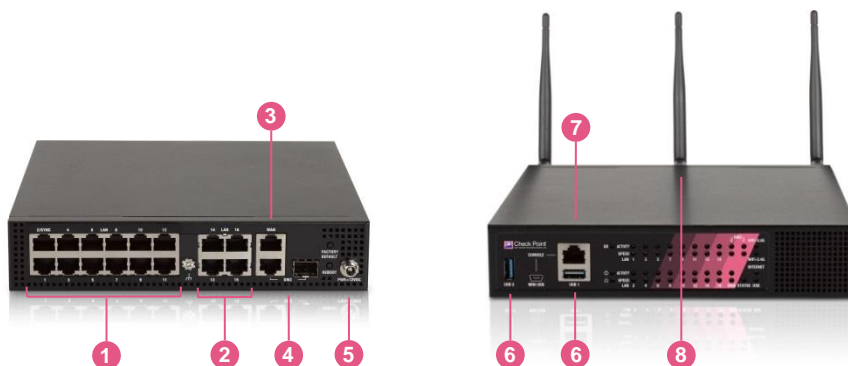

	1470	1490
Ideal Testing Conditions		
Firewall 1518 Byte UDP Packets (Mbps)	3,200	4,000
IPS Throughput (Mbps)	700	800
NGFW Throughput (Mbps) ¹	625	800
Threat Prevention (Mbps) ²	500	550
VPN AES-128 Throughput (Mbps)	500	1,000
Connections per Second	30,000	40,000
Concurrent Connections	500,000	500,000
Real-World Production Conditions		
SecurityPower	194	233
Firewall Throughput (Mbps)	1,600	1,800
IPS Throughput (Mbps)	285	375
NGFW Throughput (Mbps) ¹	240	310
Threat Prevention (Mbps) ²	175	220
Software		
Security	Firewall, VPN, User Awareness, QoS, Application Control, URL Filtering, IPS, Anti-Bot, Antivirus, Anti-Spam and SandBlast Threat Emulation (sandboxing)	
Unicast, Multicast Routing	OSPFv2, BGPv4 and 4++, RIP, PIM (SM, DM, SSM), IGMP	
Mobile Access User License	200 in default package, 300 maximum	200 in default package, 300 maximum
Hardware		
WAN	1x 10/100/1000Base-T RJ-45 port	
DMZ	1x 10/100/1000Base-T RJ-45 / 1x 1000BaseF SFP (transceiver not included) port	
LAN Switch	16x 10/100/1000Base-T RJ-45 ports (total)	
PoE Ports (optional)	4x 10/100/1000Base-T RJ-45 out of the 16 LAN ports	
Wi-Fi (optional)	802.11 b/g/n and 802.11 n/ac MIMO 3x3	
Radio Band (association rate)	2 concurrent: 2.4Ghz (max 450 Mbps) and 5Ghz (max 1300 Mbps)	
Console Port	1x RJ-45, 1x Mini USB	
USB Port	2x USB 3.0	
SD Card Slot	Micro SDHC slot	
3G/4G Modem Support	Yes	
Dimensions		
Enclosure	Desktop	
Dimensions WxHxD	210 x 42.5 x 200.5 mm, 8.3 x 1.7 x 7.9 in.	
Weight	1.6 kg (3.6 lbs.)	
Environment		
Operating / Storage	0°C ~ 40°C / -45°C ~ 60°C (5~95%, non-condensing)	
Power Requirements		
AC Input	110 – 240V, 50 – 60 Hz	
Power Supply Rating	12V/5.4A 65W, 12V/12.5A 150W (PoE option)	
Total Available PoE Power	Max load on each 4x PoE ports: 15.4 W (802.3af), or use only 2x PoE ports with max load of 31W (802.3at) each	
Power Consumption (Max)	55W (wired), 60W (Wi-Fi option), 130W (PoE option)	
Heat Dissipation	187.7 BTU/hr (wired), 204.7 BTU/hr (Wi-Fi option), 443.6 BTU/hr (PoE option)	
Certifications		
Safety/Emissions/Environment	UL/c-UL, IEC 60950 CB / EMC: EN55022 Class B, FCC: Part 15 Class B / RoHS, REACH, WEEE	

¹ Includes Firewall, Application Control and IPS

² Includes Firewall, Application Control, URL Filtering, IPS, Antivirus, Anti-Bot and SandBlast Zero-Day Protection

ORDERING INFORMATION

Wi-Fi or Wi-Fi +DSL (1430/1450) APPLIANCE OPTION (replace –xx in the SKU to specify the Wi-Fi region) ¹			
1430 Security Appliance with Threat Prevention security suite		CPAP-SG1430-NGTP-W or WDSL-xx	
1430 Security Appliance with Threat Prevention security suite and SandBlast		CPAP-SG1430-NGTX-W or WDSL-xx	
1450 Security Appliance with Threat Prevention security suite		CPAP-SG1450-NGTP-W or WDSL-xx	
1450 Security Appliance with Threat Prevention security suite and SandBlast		CPAP-SG1450-NGTX-W or WDSL-xx	
1470 Security Appliance with Threat Prevention security suite		CPAP-SG1470-NGTP-W-xx	
1470 Security Appliance with Threat Prevention security suite and SandBlast		CPAP-SG1470-NGTX-W-xx	
1490 Security Appliance with Threat Prevention security suite		CPAP-SG1490-NGTP-W-xx	
1490 Security Appliance with Threat Prevention security suite and SandBlast		CPAP-SG1490-NGTX-W-xx	
POWER OVER ETHERNET (PoE) APPLIANCE OPTION ¹			
1470 Security Appliance with Threat Prevention security suite, Wired, PoE		CPAP-SG1470-NGTP-PoE	
1470 Security Appliance with Threat Prevention security suite and SandBlast, Wired, PoE		CPAP-SG1470-NGTX-PoE	
1490 Security Appliance with Threat Prevention security suite, Wired, PoE		CPAP-SG1490-NGTP-PoE	
1490 Security Appliance with Threat Prevention security suite and SandBlast, Wired, PoE		CPAP-SG1490-NGTX-PoE	
WIRED APPLIANCE ¹			
1430 Security Appliance with Threat Prevention security suite		CPAP-SG1430-NGTP	
1430 Security Appliance with Threat Prevention security suite and SandBlast		CPAP-SG1430-NGTX	
1450 Security Appliance with Threat Prevention security suite		CPAP-SG1450-NGTP	
1450 Security Appliance with Threat Prevention security suite and SandBlast		CPAP-SG1450-NGTX	
1470 Security Appliance with Threat Prevention security suite		CPAP-SG1470-NGTP	
1470 Security Appliance with Threat Prevention security suite and SandBlast		CPAP-SG1470-NGTX	
1490 Security Appliance with Threat Prevention security suite		CPAP-SG1490-NGTP	
1490 Security Appliance with Threat Prevention security suite and SandBlast		CPAP-SG1490-NGTX	
WI-FI REGIONS (replace –xx in the SKU to specify the Wi-Fi region)			
USA, Canada	add -US	Israel	add –IL
Europe	add -EU	China	add –CN
Japan	add -JP	India, Chile	add –IN
Australia, Argentina	add -AU	New Zealand	add –NZ
Latin America, Singapore, Hong Kong, Thailand, Sri-Lanka	add -LA		

¹ Threat Prevention includes IPS, Application Control, URL Filtering, Antivirus, Anti-Bot, and Anti-Spam updates for the first year; SandBlast includes Threat Emulation (sandboxing).

EXTEND YOUR SOLUTION

SECURITY SERVICE EXTENSION ¹	
Next Generation Threat Prevention Blades Package for 1 year for 14x0 Appliance	CPSB-NGTP-14x0-1Y
Next Generation Threat Prevention Blades Package and SandBlast for 1 year for 14x0 Appliance	CPSB-NGTX-14x0-1Y
ADDITIONAL SOFTWARE BLADES ²	
Mobile Access Blade for 50 concurrent connections	CPSB-MOB-50

¹ NGTP and NGTX SKUs for 2 and 3 years are available, see the online Product Catalog

² The base packages include a license for 100 (1430/1450) and 200 (1470/1490) concurrent Mobile Access users. The MOB license is additive.

ACCESSORIES	
SFP short range transceiver (for the DMZ 1000BaseF port)	CPAC-TR-1SX-1200R
SFP long range transceiver (for the DMZ 1000BaseF port)	CPAC-TR-1LX-1200R
SD memory card 8 GB	CPAC-8GB-SD-1200R
SD memory card 32 GB	CPAC-32GB-SD-1200R
1400 appliance single/dual chassis rack shelf kit	CPAC-RM-700/1400
Additional/Replacement AC Power Supply for 770, 790, 1470 and 1490 appliances	CPAC-PSU-790/1490

CONTACT US

EMAIL: INFO@CHECKPOINT.COM

WEB: WWW.CHECKPOINT.COM